

Network Keyboard

KB-1100



KB-1100

Key Features

LCD screen display

Four-dimensional joystick control

Based on IP network

Support multiple user permissions

Connectable to NVR to control NVR menu and PTZ operations


Multiple devices can be connected




Specifications

Product model	KB-1100
Joystick	four-dimensional joystick
Ethernet port	1 RJ-45 10 M / 100 M adaptive Ethernet port
USB Interface	1 USB2.0 interfaces
Serial Interface	1 RS-232, 2 RS-485
Power Supply	12V DC
Consumption	5W
Working Temperature	-10°C ~ + 55°C
Working Humidity	10% ~ 90%
Dimensions	47mm×270mm×440mm(1.9"×10.6"×17.3")
Weight	<1kg

Interface figure

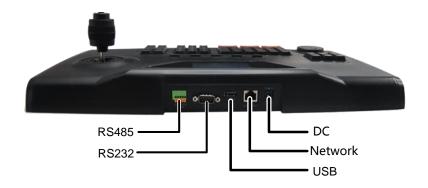

Dimensions

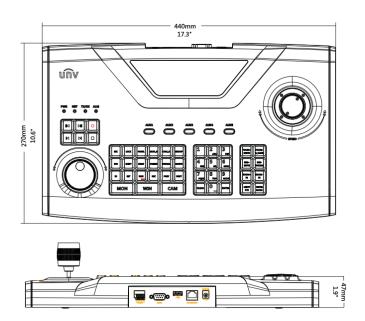



Zhejiang Uniview Technologies Co., Ltd.

Building No.10, Wanlun Science Park, Jiangling Road 88, Binjiang District, Hangzhou, Zhejiang, China

Email: overseas business@uniview.com; global support@uniview.com

http://www.uniview.com

 $\hbox{@2011-2016 Zhejiang Uniview Technologies Co.,} Ltd. \ All \ rights \ reserved.$

*Product specifications and availability are subject to change without notice.