


UTP Category 6 Cables CCA

Content of Data Sheet		
Product model	CAB-6-CCA	
Product specification	HSYV-6 4×2×0.585	
Conductor	Material	CCA(Copper content:27%)
	AWG	23
	Nom.O.D.(mm)	0.585±0.05 mm
	DC resistance	<12Ω/100m
Insulation	Material	HDPE
	Thickness	0.2±0.02 mm
	Diameter	1.05±0.05 mm
	Color	Blue/White- Blue Orange/White-Orange
Pitch	Offset pitch	≤20 mm
	Cable pitch	≤120 mm
Sheath	Material	PVC
	External O.D.	6.2±0.3 mm
	Color	White
	Tensile strength	>13.5 Mpa
	Thickness	0.5±0.05 mm
Surface Printing	Letter height	3.0±0.3 mm
	Color	Black
	Print error & Space	1±0.005 m
	Case number	Yes
Packing	Packing	Carton

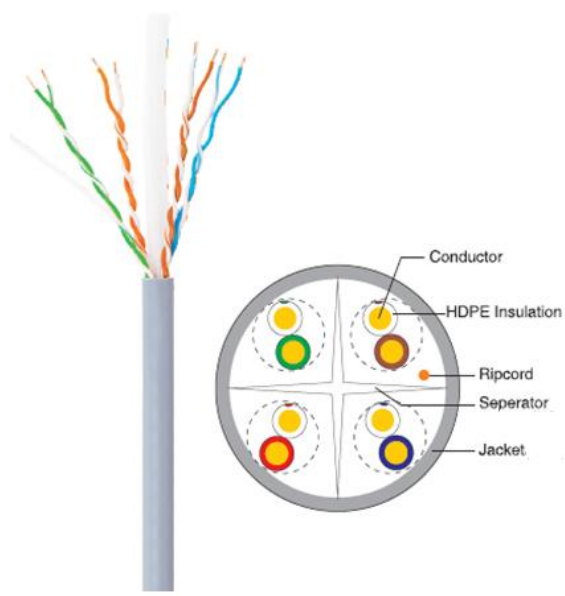

	Once packing dimension	310mm*310mm*190mm		
	Twice packing dimension	400mm*330mm*330mm		
	Twice packing quantity	2		
Packing length	100±1m			
Rip-cord	Yes	Crossing backbone	Yes	
Ambient temperature	-20°C ~ 60°C			

Zhejiang Uniview Technologies Co.,Ltd.

Building No.10, Wanlun Science Park, Jiangling Road 88, Binjiang District, Hangzhou, Zhejiang, China

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://www.uniview.com>

©2011-2018 Zhejiang Uniview Technologies Co.,Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.