

Network Video Recorder NVR502-E-IM-G Series



Features

- Support Ultra H.265/H.265/H.264 video formats
- Support 16/32-channel input
- Support 1-ch HDMI, 1-ch VGA, HDMI and VGA simultaneous output
- Support 32 Megapixels resolution recording
- Support ANR technology to enhance the storage reliability when the network is disconnected
- Support SeekFree function: up to 16-ch with 3rd party IPC, up to 32-ch with UNV SIP/UMD IPC
- Support external USB keyboards
- Support SIP, Video Metadata, LPR , Face Detection and face detection by NVR
- Support cloud upgrade

Specifications


Model	NVR502-16E-IM-G		NVR502-32E-IM-G	
Decoding				
Decoding Format	Ultra 265, H.265, H.264			
Decoding Capability	Smart Off: H265/H264: 2 x 32MP@30, 4 x 16MP@30, 5 x 12MP@30, 8x 4K@30, 10x 6MP@30, 12x 5MP@30, 16 x 4MP@30, 16 x 3MP@30, 16 x 1080P@30 Smart On: H265/H264: 1 x 32MP@30, 2 x 16MP@30, 2 x 12MP@30, 4 x 4K@30, 5 x 6MP@30, 6 x 5MP@30, 8 x 4MP@30, 10 x 3MP@30, 16 x 1080P@30			
Decoding Capability Description	The resolution of each channel cannot exceed 8192 pixels in length or width			
Audio Compression	G.711A, G.711U			
Network				
Incoming Bandwidth	192 Mbps			
Outgoing Bandwidth	192 Mbps			
Max Users Can Be Added	32			
Max Remote Users	128			
Protocols	TCP/IP, P2P, SMTP, NFS, RTSP, UPnP, NTP, DHCP, PPPoE, HTTP, DNS, DDNS, IPv6, IPv4, HTTPS			
Browser (Plugin)	Chrome 45+, Edge 79+, Firefox 52+			
Browser (Plugin-Free)	Chrome 57+, Edge 16+, Firefox 58+, Safari 11+			
Video/Audio Input				
IP Video Input	16-ch		32-ch	
BNC Audio Input	N/A			
RCA Audio Input	1-ch			
3.5mm Audio Input	N/A			
Peripheral Input				
Ip Speaker	32-ch			
POS	All channels			
Video/Audio Output				
Video Output	Support 1-ch HDMI, 1-ch VGA, HDMI and VGA simultaneous output			
HDMI Output	4K (3840 × 2160)/30 Hz, 1920 × 1080/60 Hz, 1920 × 1080/50 Hz, 1280 × 720/60 Hz,			
VGA Output	1920 × 1080/60 Hz, 1280 × 720/60 Hz			
HDMI Standard	HDMI1.4			
BNC Audio Output	N/A			
RCA Audio Output	1-ch			
Liveview Display	1/4/6/8/9/16		1/4/6/8/9/16/25/32	
3.5mm Audio Output	N/A			
Default Num of Live Screen	16		32	
Corridor Mode Screen	3/4/5/7/9/10/12/16		3/4/5/7/9/10/12/16/32	
Playback Screen	1/4/9/16			

Corridor Mode Screen of Playback	1/3
Two-way Audio	
Two-way Audio	1-ch, RCA (Using the audio input and output)
Snapshot	
FTP/Schedule/Event Snapshot	16-ch snapshot (max. 8 MP (3840 × 2160) video resolution, with 1080P snapshot resolution)
Recording	
Recording Resolution	32 MP/16 MP/12 MP/8 MP/6 MP/5 MP/4 MP/3 MP/1080P/960P/720P/D1/2CIF/CIF
Num of Concurrent Playback	32-ch
Synchronous Playback in Local	16-ch
Smart Function	
Smart by IPC	All channels (up to 16 images/s in total) Face Detection, Face Comparison, Vehicle Detection (LPR), Temperature Detection, SIP, UMD, Video Metadata, Traffic Monitoring, People Counting
Smart by NVR	Face Detection, Face Comparison, Smart Intrusion Prevention (SIP), Video Metadata, Plate Comparison
Smart by NVR Analyzer Mode	Single Mode (SIP), Mixed Mode (Face Recognition+Mixed-Traffic Detection+AcuSearch/AcuTrack), Modes cannot active simultaneously, only one mode can active at a time.
VCA Search	Face Snapshot Search, Face Comparison Search, Behavior Search, Motor Vehicle Search, Non-Motor Vehicle Search, Human Body Search, General Search, People Counting Report, SmartSearch+, AcuSearch, AcuTrack, SeekFree
AcuSearch	
Acu Search Performance	All channels with UNV SIP/UMD Camera, Up to 16-ch with normal camera (UNV and Third-part brand, 16-ch 2MP, 8-ch 4MP, 4-ch 4K)
SeekFree	
SeekFree Performance	All channels with UNV SIP/UMD Camera, Up to 16-ch with normal camera (UNV and Third-part brand, 16-ch 2MP, 8-ch 4MP, 4-ch 4K)
SeekFree Language	English
face detection	
face detection by NVR	All channels with UNV Face Detection Camera, Up to 16-ch with normal camera (UNV and Third-part brand, 16-ch 2MP, 8-ch 4MP, 4-ch 4K)
Search by Image	Support
SIP	
SIP by NVR with normal cameras	Up to 16-ch with normal camera (UNV and Third-part brand, 16-ch 2MP, 8-ch 4MP, 4-ch 4K)
Plate Comparison	
Vehicle Number Library	Up to 5 vehicle picture libraries, with up to 25,000 vehicle pictures in total
Video Metadata	
Video Metadata by NVR with normal cameras	Up to 16-ch with normal camera (UNV and Third-part brand, 16-ch 2MP, 8-ch 4MP, 4-ch 4K)
Video Metadata Type	Motor Vehicle: Vehicle Type, Vehicle Color, Vehicle Brand, Direction, Plate Type, Plate Color, Non-Motor Vehicle: Non-Motor Vehicle Type, Direction, Gender, Age, Upper Garment Length,

	Upper Garment Color, Human Body: Gender, Age, Mask, Hairstyle, Bag Style, Direction, Upper Garment Length, Lower Garment Length, Upper Garment Color, Lower Garment Color
Capacity of Smart Snapshots	
Capacity of Snapshot Records	2 millions records for face snapshot, 2 millions records for vehicle snapshot, 2 millions records for SIP
Alarm	
General Alarm	Defocus Detection, Scene Change Detection, Object Left Behind, Object Removed, Auto Tracking, Motion Detection, Tampering, Human Body Detection, Video Loss, Audio Detection, Alarm Input
Alert Alarm	IP Conflict, Network Disconnected, Disk Offline, Disk Abnormal, Illegal Access, Hard Disk Space Low, Hard Disk Full, Recording/Snapshot Abnormal, Array Damaged, Array Degraded
Hard Disk	
SATA	2 SATA Interfaces
Capacity	Up to 24 TB for each HDD (The maximum HDD capacity varies with environment temperature and hard disk size, The environment temperature for use should not exceed 40°C.)
Disk Group	Support
Redundant Storage	Support
Disk Array Type	RAID 1
Hot Swap	N/A
External Interface	
Network Interface	2 RJ45 10 M/100 M/1000 M self-adaptive Ethernet Interface
Network Working Mode	Multi-access, load balance, network fault-tolerance
USB	Front panel: 1 × USB2.0, Rear panel: 1 × USB2.0, 1 × USB3.0
RS485	1
RS232	N/A
Alarm In	4-ch
Alarm Out	1-ch
eSATA	N/A
miniSAS	N/A
Power Output	N/A
Extension Board	N/A
Buzzer	Support
Power Supply	DC 12 V/3 A
Power Switch	N/A
Redundant Power Supply	N/A
PoE	
PoE Interface	N/A
Max Power	N/A
Supported Standard	N/A
Working Environment	
Working Temperature	-10 °C to 55 °C (14 °F to 131 °F)
Working Humidity	≤ 90% RH (non-condensing)
Power Consumption (without HDD)	≤25W

Heat Dissipation	Fan, Radiator
Dimensions	
Weight (without HDD)	1.87 KG
Height	1U
Dimensions	380mm × 322.4mm × 53mm (15.0" × 12.7" × 2.1")
GUI Language	
GUI Language	38 languages: Simplified Chinese, Traditional Chinese, English, Vietnamese, Thai, Turkish, Spanish (Latin America), Portuguese (Brazil), Spanish, Portuguese, French, German, Italian, Dutch, Polish, Czech, Hungarian, Slovak, Russian, Hebrew, Arabic, Ukrainian, Estonian, Bulgarian, Greek, Romanian, Danish, Swedish, Norwegian, Finnish, Croatian, Slovenia, Serbia, Korean, Japanese, Latvian, Lithuanian, Persian
Certification	
Certification	CE; FCC; UL; RoHS; WEEE
CE	EN 55032, EN 61000-3-3, EN IEC 61000-3-2, EN 50130
FCC	Part15 Subpart B
Feature Supported	
Cruise Lines Num of Each Camera	4
Preset Num	32
N+1 Hot Spare	N/A
Fisheye Dewarping by IPC	Support
Fisheye Dewarping by NVR (Local)	N/A
ANR	Support
Dual-lens Cameras	Support
Downlink ONVIF	Support (Profile S)
Box-Dome Linkage	Support
Uplink ONVIF	N/A
Video Image Database (Uplink)	Support
UCS (Web socket)	Support
NAS	Support
Ucode Basic Mode	Support
Ucode Advanced Mode	Support
Output Mode	N/A
Compliance	
NDAA Compliant	Support
Others	
Decoding Capability (1080P)	16

Dimensions

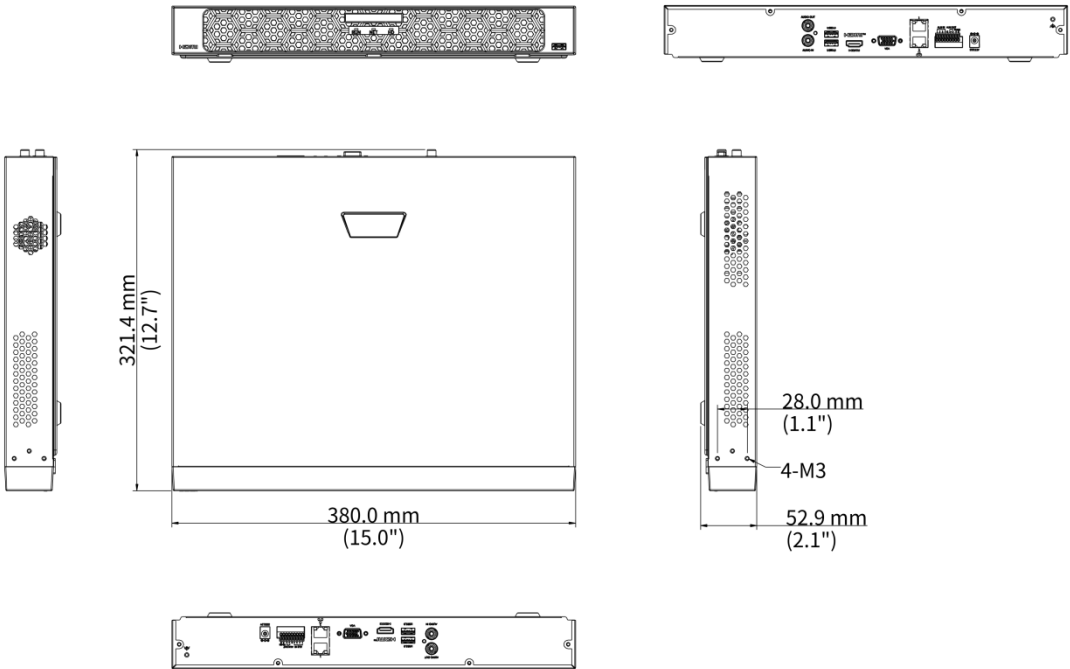

Accessories

RM-1U-380		
2 HDD 1U NVR Rack Mount		
		

Unlimited New View

Zhejiang Uniview Technologies Co., Ltd.



<http://www.uniview.com>



overseasbusiness@uniview.com; globalsupport@uniview.com



No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China



©2023-2025 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.

Despite our best efforts, technical or typographical errors may exist in this document. Uniview cannot be held responsible for any such errors and reserves the right to change the contents of this document without prior notice.